


SMA DC-26.5GHz 50W TERMINATION


--- RFST50G26S

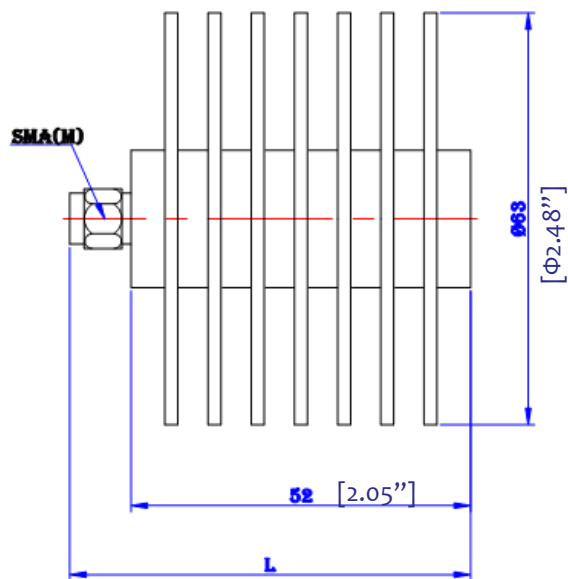

1.0	Mechanical Specifications	
1.1	Coaxial Connector	SMA,-Male
1.2	External Body Finish	Body painted black epoxy enamel
1.3	Weight	130g

2.0	Environment specifications	
2.1	Operation Temp.	-50°C~+120°C (case temp.)
2.2	Storage Temp.	-55°C~+125°C
2.3	Vibration	10g rms (15 degree 2KHz)
2.4	Humidity	100% RH at 35c, 95%RH at 40°C
2.5	Shock	20G for 11msc

3.0	Electrical Specifications	
3.1	Frequency Range	DC-26.5GHz
3.2	Average Power	50w
3.3	VSWR	1.10-1.30:1
3.4	Peak Power	0.5KW

PAGE 1 OF 1	DATE MAY 6 th 2000
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY</small>	DESIGN
	RFPC
	RF-LAMBDA
	RFPC
	CAD MODEL REVISION 10
 RFST50G26S Termination	ASSEMBLY REVISION V552
	ASSEMBLY NAME RFLVR07
	DRAWING NUMBER D05A
www.rflambda.com	
RF-LAMBDA	SIZE LT SHEETS 1 OF 1