

## WR-22 Flexible Twistable Waveguide Section, 11.81" (300 mm) Length

### Description:

**Model SWG-22118-FB-FT-A-G** is a 11.81" (300 mm) long, Q-band flexible and twistable waveguide section with a WR-22 waveguide and UG-383/U anti-cocking flange. It also has a vulcanized silicone rubber jacket for robustness applications. The waveguide features a flexible bend with a static twist to be long-term stress free when it is integrated into systems. The flanges of the waveguide are grooved to accept rubber rings to be watertight for outdoor applications. The waveguide is manufactured with a precision manufacturing process to ensure high quality. The waveguide has low insertion loss in the frequency range of 33 to 50 GHz. Various standard and custom length options are available under different model numbers.



### Features:

- High Quality
- Flexible Bending and Static Twisting
- Comparable Cost to the Rigid Waveguide

### Applications:

- 5G Systems
- Communication Systems
- Various Outdoor Equipment

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	33 GHz		50 GHz
Insertion Loss		0.8 dB	
Return Loss		14 dB	
Specification Temperature		+25 °C	
Operation Temperature	-40 °C		+85 °C

### Mechanical Specifications:


Item	Specification
Waveguide Port	WR-22 Waveguide with UG-383/U Anti-Cocking Grooved Flange
Minimum Bending Radius (Static)	E-plane: 1" (26 mm); H-plane: 2" (52 mm)
Minimum Bending Radius (Dynamic)	E-plane: 3" (78 mm); H-plane: 6.6" (158 mm)
Maximum Torsion Angle (Static)	530°/meter
Maximum Torsion Angle (Dynamic)	230°/meter
Material	Brass
Flange Finish	Nickel Plated
Waveguide Finish	Silver Plated
Waveguide Jacket Material	Vulcanized Silicone Rubber
Weight	2.6 Oz
Insertion Length	11.81" (300 mm) (±3 %)
Outline	WG-FQ-FT-A-G-L






## WR-22 Flexible Twistable Waveguide Section, 11.81" (300 mm) Length

### Typical Performance vs. Frequency

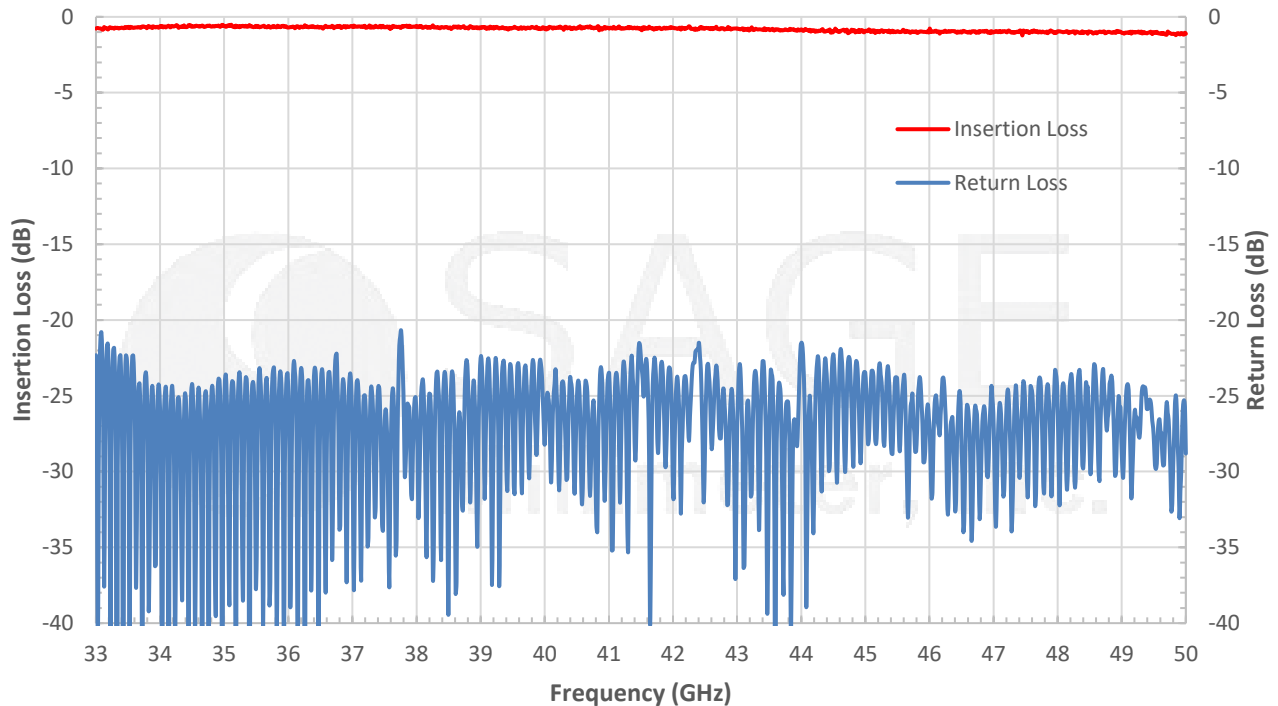

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

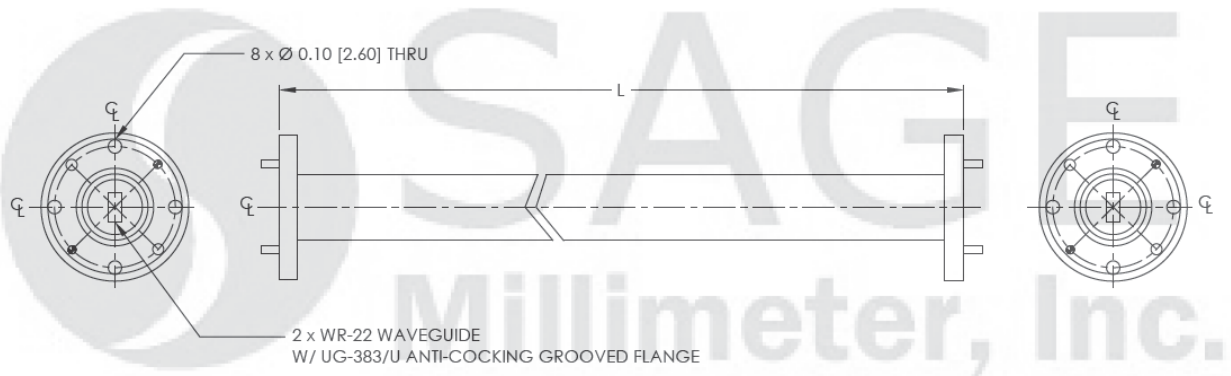

#### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

#### Caution:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com