

RF AMPLIFIER

MODEL QBH-223

Available as: QBH-223, F-Pack (E52-5006)

Features

- High Gain: 11.5 dB Typical
- High Power: +21 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications







CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 300 MHz	10 - 300 MHz
Gain (dB)	11.5 ± 0.5	—
Gain vs. Temperature	—	+0.5/-0.5 Max.
Gain Flatness	1.0	1.0 Max.
Reverse Isolation (dB)	-25	-25 Min.
VSWR In	1.5:1	1.5:1 Max.
VSWR Out	1.5:1	1.5:1 Max.
1 dB Compression (dBm)	+21	+21 Min.
Output Intercept point 3rd Order	+36	+35 Min.
2nd Order	+50	+44 Min.
Noise Figure (dB)	6.3	6.7 Max.
Power Vdc	+15	+15
mA	94	94 Max.

Maximum Ratings

Ambient Operating Temperature -55°C to + 125 °C
 Storage Temperature -65°C to + 150 °C
 Case Temperature + 125 °C
 DC Voltage + 20 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Note: Specifications are guaranteed when tested in a 50 Ohm system.
 Specifications indicated as typical are not guaranteed.

Typical Performance Data

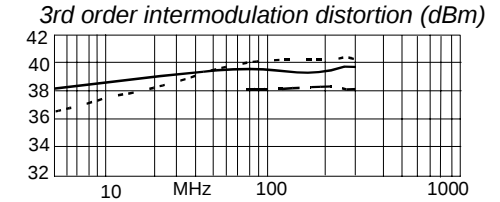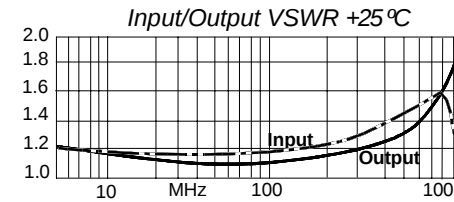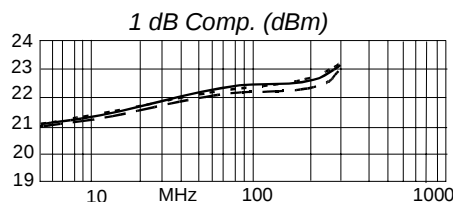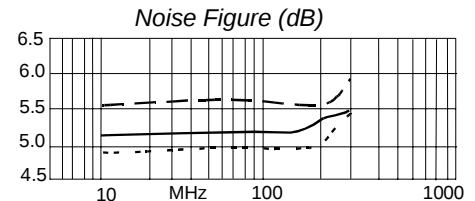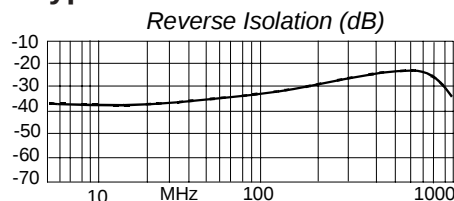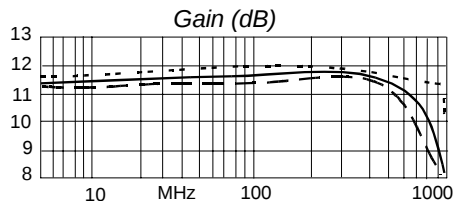

Legend ——— + 25 °C --- + 85 °C - - - - - -55 °C

Linear S-Parameters Data

FREQ. MHz	-- S11-- dB	-- S11-- Ang	-- S21-- dB	-- S21-- Ang	-- S12-- dB	-- S12-- Ang	-- S22-- dB	-- S22-- Ang
10	-24.1	-18.7	11.7	-176.0	-36.5	17.3	-24.1	78.1
40	-22.4	0.9	11.8	168.0	-35.9	13.6	-26.3	30.5
50	-22.0	0.4	11.8	164.1	-35.7	14.2	-26.1	24.9
60	-21.7	-1.0	11.8	160.3	-35.3	14.5	-25.8	20.6
80	-21.0	-4.0	11.7	153.0	-34.6	16.9	-25.3	14.4
90	-20.8	-4.6	11.7	149.4	-34.2	16.4	-25.0	11.8
100	-20.5	-6.1	11.7	145.8	-33.8	15.6	-24.7	9.0
200	-18.2	-25.2	11.7	110.4	-30.3	3.9	-23.2	-2.9
300	-16.6	-48.9	11.7	74.6	-27.8	-16.2	-22.3	-8.9



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 03/11/05

www.SpectrumMicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001