

8

7

6

5

Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

Specifications:

- Frequency Range: 0.25 to 2.0 GHz
- Gain: 30dB Typ.
- Gain Flatness: +/-0.5dB Max.
- Noise Figure: 4.5dB Typ.
- OP1dB: 13dBm Min.
- VSWR Input/Output: 2.0:1 Max.
- DC Voltage Supply: +12 to +15V/DC
- DC Current Draw: 130mA Max.

Features:

- Internal Voltage Regulation
- Unconditional Stability
- Standard Operating Temperature -20 to +70 Deg. C


Available Options:

- Various Package types
- Various Connector types
- Temperature Compensation
- Hermetic Sealing
- Gain and Phase Matching
- MIL-STD-883 Screening Available


Environmental Ratings:

- Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C (Available)
 - 55 to +125 Deg. C (Storage)
 - Humidity: MIL-STD-202F, METHOD 103B COND B.
 - Shock: MIL-STD-202F, METHOD 213B COND B.
 - Altitude: MIL-STD-202F, METHOD 105C COND B.
 - Temperature Cycle: MIL-STD-202F, METHOD 107D COND A
- Note: The above specifications are subject to change or revision.


PE2 HOUSING WITH CARRIER

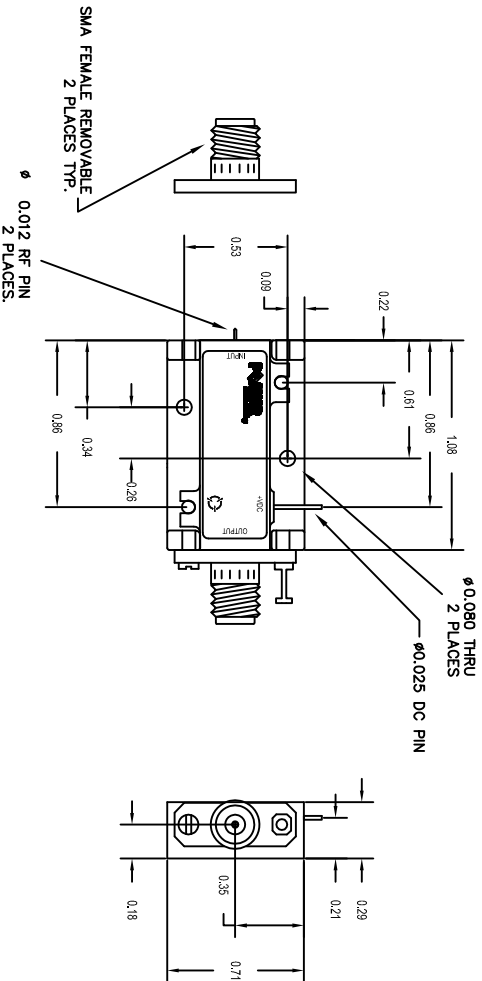

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

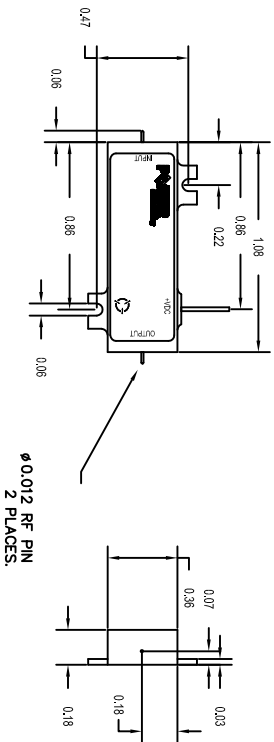

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ± 0.010 ±
.XXX ± 0.005

PART NO.		APPROVALS		
MATERIAL:	THRU	DESIGN	DATE	
6061-T6 Aluminum	8081	K. Mason	8/21/98	PRODUCT FEATURE PE2-30-0R252R0-4R5-15-12-SFF
FINISH:				
Gold Plate over Nickel				
DO NOT SCALE DRAWING				