


DESCRIPTION:

PFC model number 8CL6D1G-200-CD-SFF is a Combine Bandpass filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

SPECIFICATIONS:

- CENTER FREQUENCY: 6100 MHz
- 3dB BANDWIDTH: 200 MHz
- VSWR IN THE PASS BAND: 1.5:1 MAX.
- INSERTION LOSS (PASSBAND): < 2 dB MAX.
- REJECTION @ 5900 MHz: -40 dB
- REJECTION @ 6300 MHz: -40 dB
- REJECTION FROM 6400 TO 18000 MHz: -60 dB

- CONNECTORS: SMA FEMALE CONNECTORS
- SIZE: 2.30" (L) x 0.625" (W) x 0.35" (H)
- WEIGHT: 1 OZ. TYP.

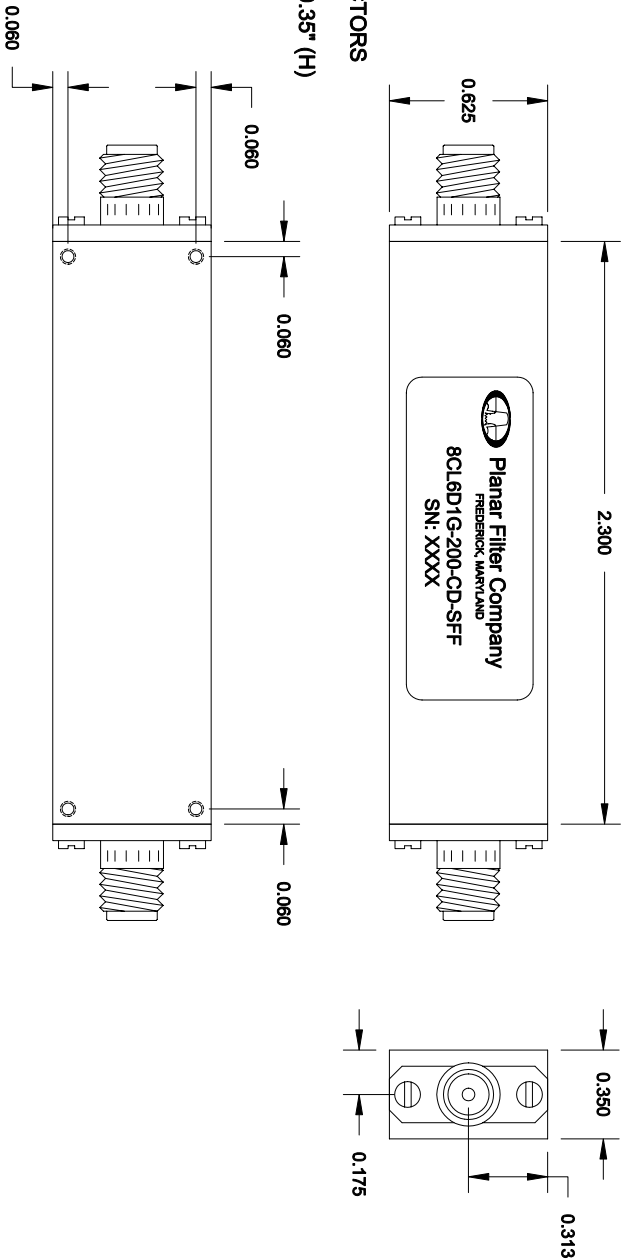

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
XXX ±0.010
XXXX ±0.005

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	—	ORIGINAL RELEASE	9/11/01

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PART NO. 155-0889		Planar Filter Company 7311G Grove Road, Fredrick, Maryland	
APPROVALS	DATE	TITLE OUTLINE DRAWING 8CL6D1G-200-CD-SFF	
DRAWN S PALACIO	9/11/01		
CHECKED			
ISSUED			
SIZE A	FSCM NO. 1QJW0	DWG NO. 155-0889	REV. —
SCALE N/A		SHEET 1	OF 1