

DESCRIPTION

PMI MODEL TD-70M330M-CD-SFF IS A HIGH SPEED THRESHOLD DETECTOR DESIGNED TO OPERATE OVER THE 70 MHz TO 330 MHz FREQUENCY RANGE. IT HAS AN EXTERNAL ADJUSTMENT TO VARY THE THRESHOLD LEVEL FROM -25 dBm TO -5 dBm.

SPECIFICATIONS

- FREQUENCY RANGE: 70 MHz TO 330 MHz MINIMUM
- VSWR: 2.6:1 TYPICAL
- DYNAMIC RANGE: -25 dBm TO -5 dBm
- THRESHOLD VARIATION: ± 0.75 dB MAXIMUM (WITH FREQUENCY)
- PROPAGATION DELAY: 20 ns TYPICAL, 3 dB ABOVE THRESHOLD SETTING (50% RF INPUT TO 50% LOGIC AT -10dBm)
- MINIMUM PULSE WIDTH: 100 ns TYPICAL
- OUTPUT: TTL "1" INPUT POWER > THRESHOLD SETTING, TTL "0" OTHERWISE
- TEMPERATURE STABILITY: 1.0 dB TYPICAL, 3 dB ABOVE THRESHOLD SETTING
- THRESHOLD SETTING: RESISTOR CONTROLLED CONTROL 1k TO 20k OHMS, SERIES RESISTOR FROM GND TO R(SET)
- THRESHOLD LEVEL: -25 TO -5 dBm SETTING RANGE:
- INPUT POWER: 100 mW CW MAXIMUM
- POWER SUPPLY: +/-5V @ 100 mA TYPICAL
- CONNECTORS:
 - RF: REMOVABLE SMA (FEMALE)
 - OUTPUT: REMOVABLE SMA (FEMALE)
 - THRESHOLD ADJUST: SOLDER PIN
- SIZE: 0.85" x 0.625" x 0.20"
- FINISH: PAINTED BLUE


ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +95°C (OPERATING)
..... -65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	2/15/18	

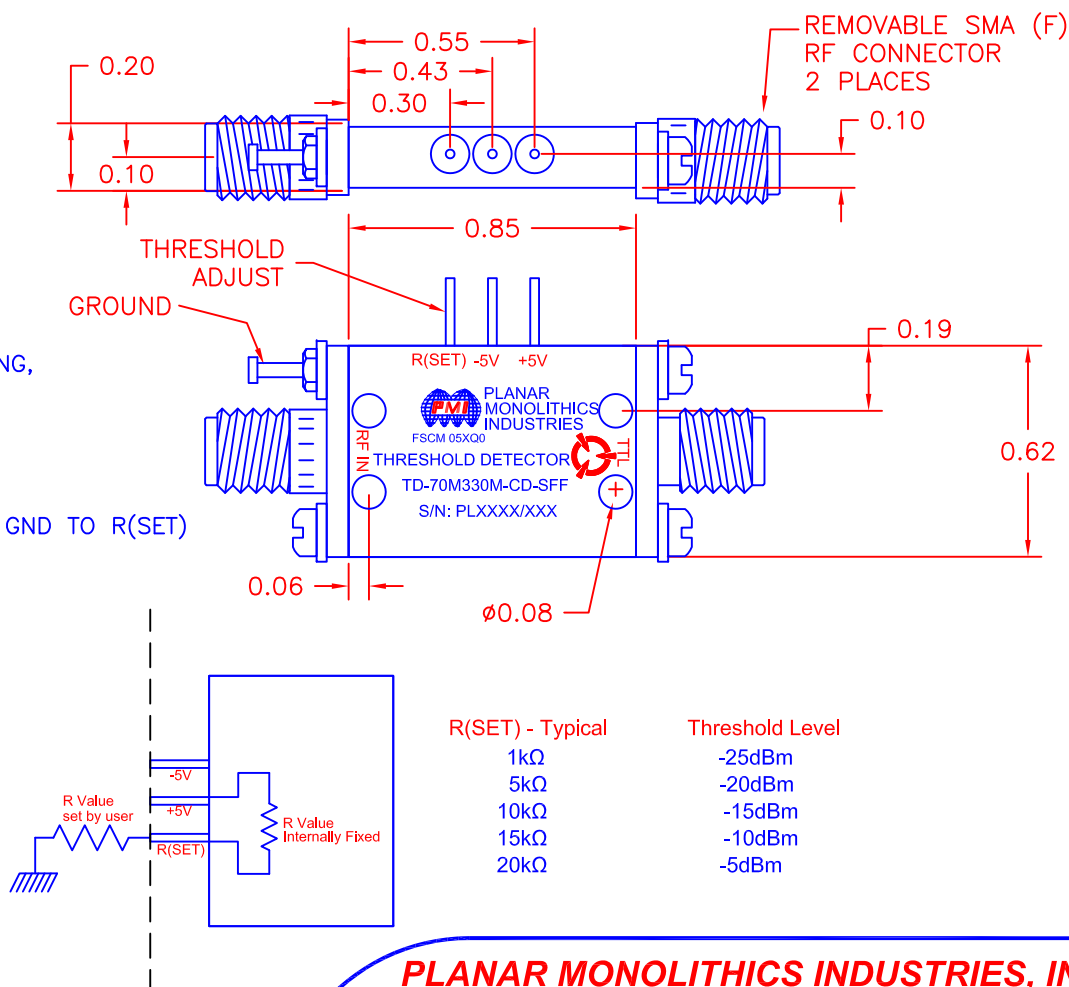

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001:2000 CERTIFIED



APPROVALS		DATE		TITLE			
DRAWN	JPH	8/10/17		PRODUCT FEATURE			
CHECKED	NFA	2/15/18		TD-70M330M-CD-SFF			
ISSUED				70MHz - 330 MHz THRESHOLD DETECTOR			
SCALE N:S		SIZE A		FSCM NO. 05XQ0		DWG NO. 27034242	
						REV. A1	
						SHEET 1 OF 1	